


# AMP25B-0.7/34

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery

vL Part # 62001000 | vR Part # 62002000 | vA Part # 62020000

dimensions

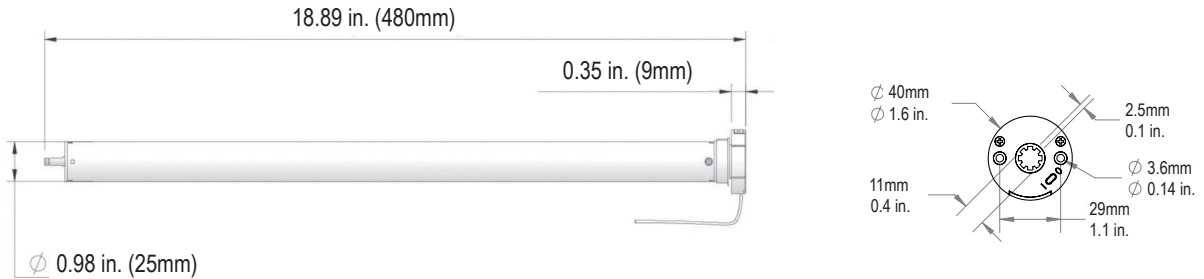

specifications


<b>Model</b>	AMP25B-0.7/34 vR; AMP25B-0.7/34 vL; AMP25B-0.7/34 vA
<b>Torque</b>	0.7Nm
<b>Speed</b>	34rpm (adjustable to 20 or 28)
<b>Motor Size (L x W x H)</b>	480mm*40mm*40mm
<b>Voltage</b>	8V DC
<b>Current</b>	1A
<b>Power</b>	8W
<b>IP Class</b>	IP20
<b>Insulation Grade</b>	A

<b>Battery Model / Type</b>	Internal / Lithium Ion
<b>Battery Capacity</b>	2200mAh
<b>Working temp</b>	32°F to 140°F (0°C to 60°C)
<b>RF Modulation</b>	FSK
<b>Radio Frequency</b>	433.92 MHz
<b>Max Running Circles</b>	6 Minutes
<b>Limit Switch Type</b>	Electronic
<b>Sound Level</b>	46dB
<b>Net Weight</b>	0.59Lbs

features & applications



built-in motor lithium battery




solar charging



bi-directional




app compatible



electronic limit



slow jog & tilt mode



leveling control




favorite position



adjustable RPM



roller shade



roman shade



banded shade



sheer shade



# AMP25B-0.7/34

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery  
vL Part # 62001000 | vR Part # 62002000 | vA Part # 62020000

