


AMP25B-1.1/28

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
 vL Part # 62003000 | vR Part # 62004000 | vA Part # 62021000

dimensions

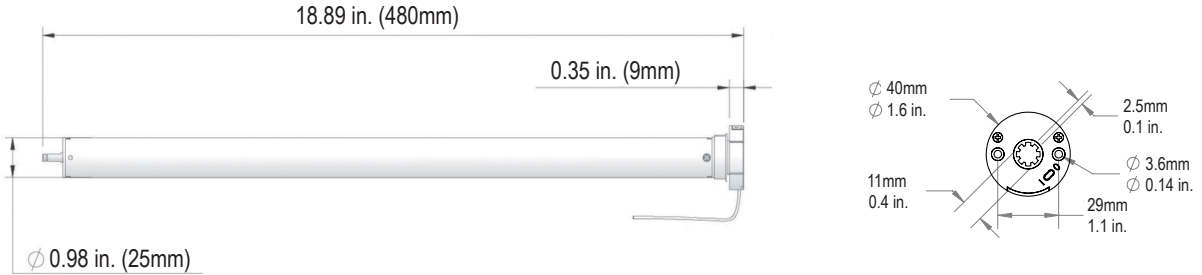

specifications

Model	AMP25B-1.1/28 vR; AMP25B-1.1/28 vL; AMP25B-1.1/28 vA
Torque	1.1Nm
Speed	28rpm (adjustable to 20 or 24)
Motor Size (L x W x H)	480mm*40mm*40mm
Voltage	8V DC
Current	0.94A
Power	8W
IP Class	IP20
Insulation Grade	A

Battery Model / Type	Internal / Lithium Ion
Battery Capacity	2200mAh
Working temp	32°F to 140°F (0°C to 60°C)
RF Modulation	FSK
Radio Frequency	433.92 MHz
Max Running Circles	6 Minutes
Limit Switch Type	Electronic
Sound Level	46dB
Net Weight	0.92Lbs




***All AMP tubular, honeycomb, and tilt motors — with or without an external battery pack — must use a minimum 2A (amp) charger to properly charge the shade. Use of a lower amperage charger may cause improper charging, permanent battery depletion, or motor failure.**

features & applications



built-in motor lithium battery




solar charging



bi-directional




app compatible



electronic limit



slow jog & tilt mode



leveling control




favorite position



adjustable RPM




roller shade



roman shade



banded shade



sheer shade



AMP25B-1.1/28

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
vL Part # 62003000 | vR Part # 62004000 | vA Part # 62021000

