


AMP28B-2.0/28

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
 vR Part # 62005000 | vA Part # 62022000

dimensions

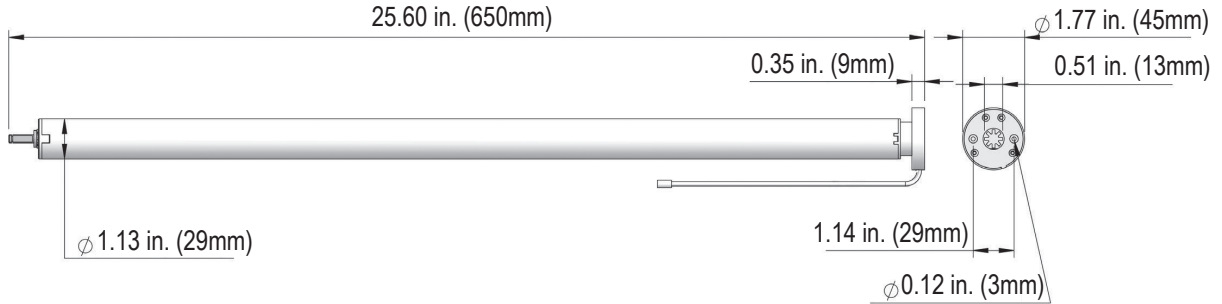

specifications

Model	AMP28B-2.0/28 vR; AMP28B-2.0/28 vA
Torque	2.0Nm
Speed	28rpm (adjustable to 20 or 24)
Motor Size (L x W x H)	650mm*45mm*45mm
Voltage	12V DC
Current	1.25A
Power	15W
IP Class	IP20
Insulation Grade	A

Battery Model / Type	Internal / Lithium Ion
Battery Capacity	2600mAh
Working temp	32°F to 140°F (0°C to 60°C)
RF Modulation	FSK
Radio Frequency	433.92 MHz
Max Running Circles	6 Minutes
Limit Switch Type	Electronic
Sound Level	47dB
Net Weight	2.14Lbs




***All AMP tubular, honeycomb, and tilt motors — with or without an external battery pack — must use a minimum 2A (amp) charger to properly charge the shade. Use of a lower amperage charger may cause improper charging, permanent battery depletion, or motor failure.**

features & applications



built-in motor lithium battery




solar charging



bi-directional




app compatible



electronic limit



slow jog & tilt mode



leveling control




favorite position



adjustable RPM




roller shade



roman shade



banded shade








sheer shade

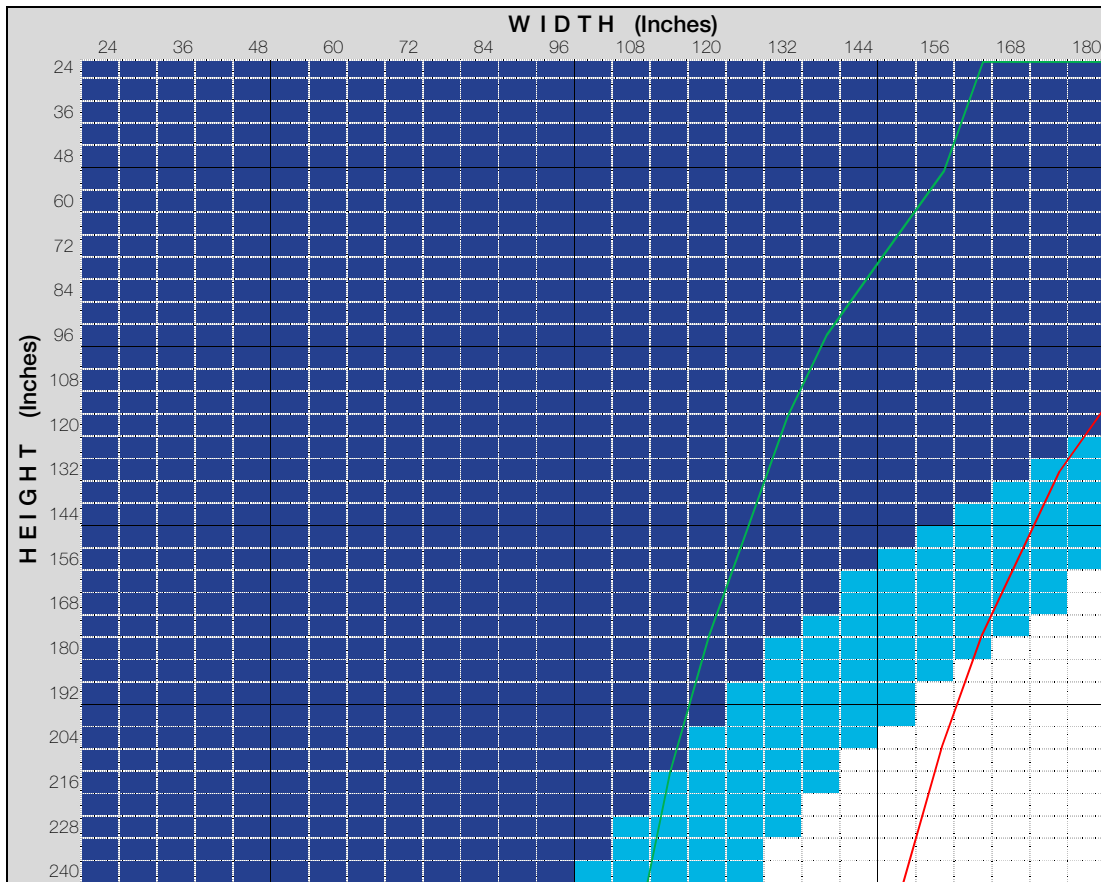

AMP28B-2.0/28

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
vR Part # 62005000 | vA Part # 62022000



	Under 80% Load
	Between 80% Load and 100% Load
	0.2% Tube Deflection (Recommended)
	0.4% Tube Deflection
Fabric:	E Screen 5% (Sunscreen)
Bottom Rail:	Fabric Wrap
Tube:	2'