


AMP35B-3.0/28

DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
 2" Part # 62001100 | 2.5" Part # 62001200

dimensions

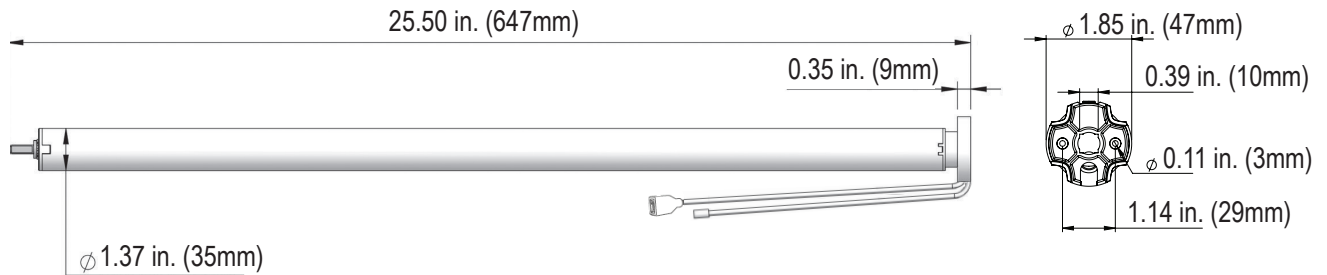

specifications


Model	AMP35B-3.0/28
Torque	3.0Nm
Speed	28rpm (adjustable to 20 or 24)
Motor Size (L x W x H)	647mm*47mm*47mm
Voltage	12V DC
Current	1.86A
Power	21W
IP Class	IP44
Insulation Grade	A

Battery Model / Type	Internal / Lithium Ion
Battery Capacity	2600mAh
Working temp	32°F to 140°F (0°C to 60°C)
RF Modulation	FSK
Radio Frequency	433.92 MHz
Max Running Circles	6 Minutes
Limit Switch Type	Electronic
Sound Level	53dB
Net Weight	2.7Lbs

features & applications



built-in motor lithium battery



solar charging




bi-directional



roller shade




app compatible



electronic limit



slow jog & tilt mode



leveling control



favorite position








adjustable RPM



AMP35B-3.0/28

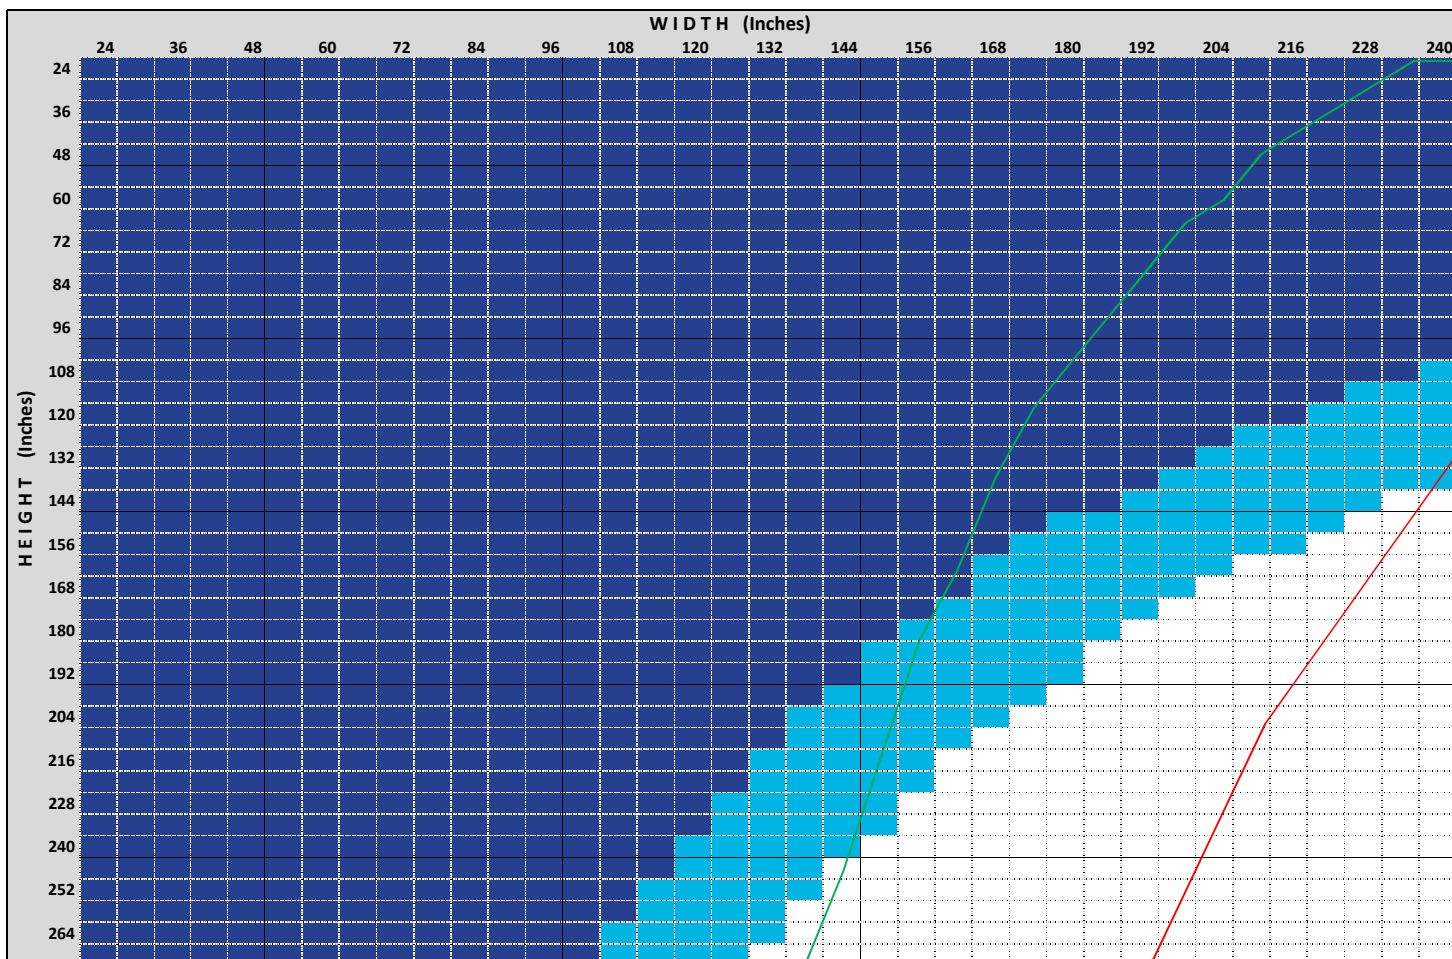DC Tubular Motor with built-in RF control and Lithium-ion rechargeable battery
2" Part # 62001100 | 2.5" Part # 62001200



	Under 80% Load
	Between 80% Load and 100% Load
	0.2% Tube Deflection (Recommended)
	0.4% Tube Deflection
Fabric:	E Screen 5% (Sunscreen)
Bottom Rail:	Fabric Wrap
Tube:	2.5"