


AMP25BDC-1.1/28

DC Tubular Motor with built-in RF control
vR Part # 62004100

dimensions

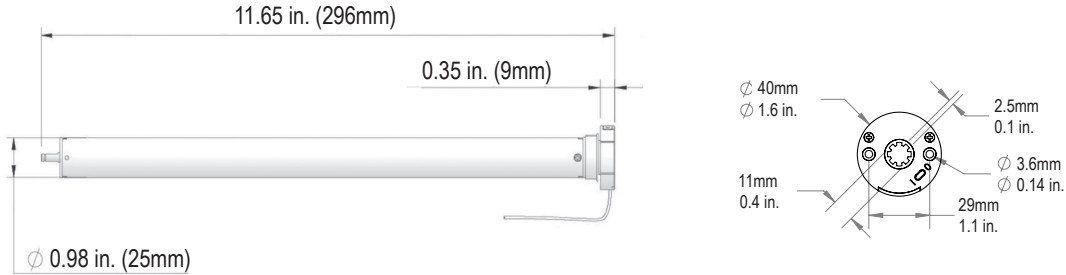

specifications


Model	AMP25BDC-1.1/28
Torque	1.1Nm
Speed	28rpm (adjustable to 20 or 24)
Motor Size (L x W x H)	296mm*40mm*40mm
Voltage	12V DC
Current	0.99A
Power	12W
IP Class	IP20
Insulation Grade	A

Battery Model / Type	External Battery Pack (PN: 62203000)
Battery Capacity	2600mAh
Working temp	32°F to 140°F (0°C to 60°C)
RF Modulation	FSK
Radio Frequency	433.92 MHz
Max Running Circles	6 Minutes
Limit Switch Type	Electronic
Sound Level	46dB
Net Weight	0.66Lbs

features & applications



external battery for head rail




solar charging



bi-directional




app compatible



electronic limit



slow jog & tilt mode




leveling control




favorite position



adjustable RPM



roller shade



roman shade



banded shade



narrow width



sheer shade



AMP25BDC-1.1/28

DC Tubular Motor with built-in RF control
vR Part # 62004100

